
PRODUCT CATALOGUE

2020





About us

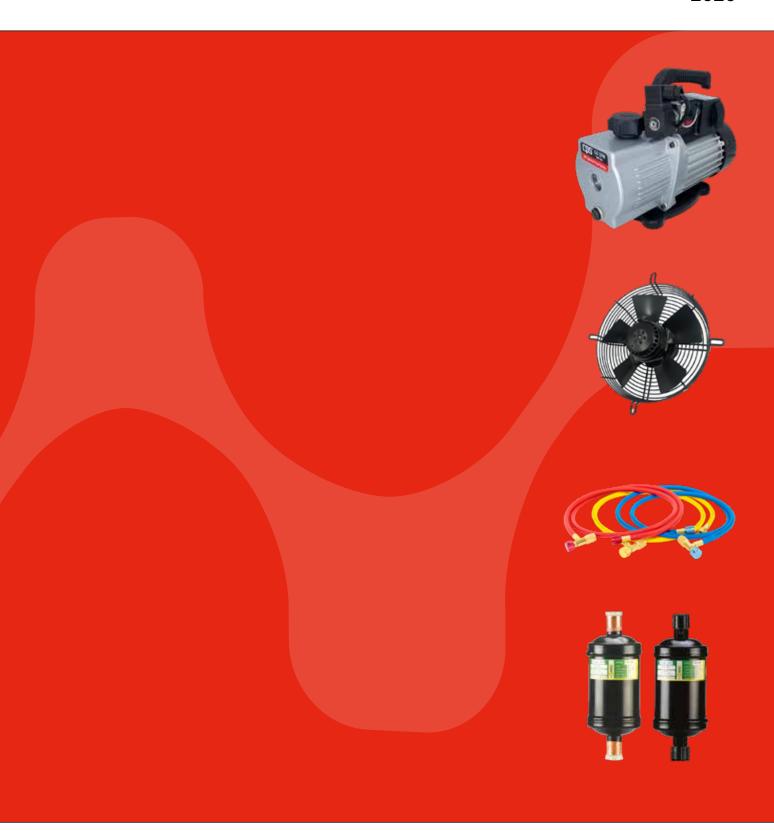

Evolution in
Distribution! We
deliver a wide
range of tools,
components and
parts to HVAC
contractors UK
wide.

Who are Evomart?
We are a specialist air-conditioning and refrigeration distributor – sourcing top quality brands and offering them an alternative route to market here in the UK.

HVAC contractors are at the heart of our business – if we can help you succeed, then we fulfil our mission.

Mission:

To empower all skilled workers and staff with the necessary tools, equipment and knowledge they need, to offer unrivalled service!

Our aim is to ensure that our customers run efficiently. We aim to reduce unnecessary downtime, only source quality products by reputable brands, and match the price expectancy required for our customers to remain profitability – resulting in an unrivalled service proposition!

Evomart was established in 2019 - Located in Aldermaston near Basingstoke & Reading. At our premises we commit to holding high level of stock to offer next day delivery services to all customers throughout the UK.

The Evomart team has more than 15 years HVAC industry experience, working closely with HVAC suppliers, wholesalers and contractors. Utilising our skills, we have now embarked on a new adventure, supporting key supplier brands here in the UK market and delivery top brands to our clients.

Great products at great prices. Evomart gives back to us for our loyalty with great incentives like Points, Giveaways and Coupons based on our spend. The VIP membership also qualifies us for extra discounts and rewards. The only wholesaler who really gives back to the contractor.

Intercold

I came across Evomart via LinkedIn and was impressed by the wide variety of products they offered.

I immediately contacted them for more information on a few products and was advised on better and alternative items that I had asked about.

I placed an order on a Saturday and on the Monday I had received an email saying my items had been dispatched and also a phone call letting me know the items was on the way.

Any queries or questions I had were answered without delay.

I received my items well packaged and safe.

Will definitely be using Evomart in the future and would recommend them to anyone looking for quality tools and customer service

Rik - Air Con



Evomart Ltd

Unit 6 Jupiter House, Calleva Industrial Park, Aldermaston, RG7 8NN Hampshire

Telephone: 0330 135 9922 Email: info@evomart.co.uk







Recovery machines





TRS600E CPS PRO SET Recovery Machine 230v R32/A2L Compatible

Key Features:

- 12:12.01 Ignition Proof standards
- For use on systems utilizing Class A1 (non-toxic, non-flammable), R32, R1234yf and R1234ze
- Maintenance free oil-less compressor
- Permanently lubricated and sealed Hard wired 9.8 ft. (3 m) power cord main bearings
- Piston seal design for less leakage and deeper vacuums

- Designed and tested to meet ANSI 38 bar manual reset high pressure cut-off switch with LED indicator
 - Integrated component moorings for quiet operation
 - Cleanable 100 mesh inlet filter
 - Ignition proof ON-OFF switch
 - Sealed start relay

 - Dry All 032F Filter & Hose Included
 - Patents pending

EVR13240 - 230V



TRS21E Recovery Machine Sparkproof

Key Features:

- Designed and tested to meet ANSI 12:12.01 Ignition Proof standards
- For use on refrigerant systems utilizing Fastest recovery rates in its class Classes A1, A2, A2L & A3; R-32, R-1234yf, • Ignition proof ON-OFF switch R-1234ze, R290
- Maintenance free oil-less compressor
- Permanently lubricated and sealed main bearings
- Improved piston seal design for less leakage and deeper vacuums
- High pressure cut-off switch with LED

- Cleanable 100 mesh inlet filter

- Sealed start relay
- Hard wired 9.8 ft. (3m) power cord
- CE. TUV listed

EVR1308 - 240V

Leak detectors







LS2 HVAC Leak Detector

Key Features:

- One button controls On/Off and all
- Microprocessor controlled sensor improves sensitivity and reduces false alarms
- Patented E_MOS detection technology increases battery and sensor life
- Replaceable EMOS2 sensor, sensor filter and sensor tip
- Metal sensor housing with patented water vapor stabilizing filter eliminates false alarms due to condensate
- Optimal leak-finding performance under a broad range of conditions

- Simple, intuitive bar graph LED display
- Software managed sensor rejuvenation at start-up ensures highest sensitivity
- Ergonomic, high-impact housing with high output alarm speaker
- Low battery indication
- Designed and manufactured in U.S.A. with U.S. and globally sourced components
- 500 hours sensor life
- 2 year warranty excluding batteries and sensor
- Both visual and audible leak indicators

EVL2011



LDA1000H Electronic **Refrigerant Leak Detector**

Key Features:

- Microprocessor controlled sensor electronics utilizing a multi channel signal • The LDA1000H is ETL Certified to meet detection method improves sensitivity while reducing false alarms.
- New E-MOS sensor technology incorporates a proprietary pulse modulation design to increase both battery and sensor life.
- Software managed sensor rejuvenation mode, initiated at each start up ensures the highest level of sensitivity every use, for up to 500 hours of detecting leaks of less than .1 oz per year.
- Sensitivity remains constant over the life

of the sensor.

- SAEJ2791 for R-134a, as well meeting all US and International standards for automotive use for SAE J2913 for HFO-1234yf, and Euro Standard EN 14624
- 50 hour battery life (3 "C" batteries) Auto Off after 10 minutes. Green LED low battery indicator.
- 500 hours sensor life
- · 2 year warranty excluding batteries and
- Both visual and audible leak indicators

EVL2011



LS2XF Replacement Sensor (10pc) Filters



EVL2028

ReplacementEMOS Sensor

EVL2011



Replacement Probe for LS1&LS2 Leak Detectors LS1PROBE-A3

EVL2030



EVL2031

Tip Housing LS2 Leak Detector LS2XVP

2 cfm





VP2D Vacuum Pump 2 stage 2cfm 220-230v (Single) Dual Voltage

Key Features:

- 50 / 60Hz
- Exceptional ultimate vacuum rating as low as 10 microns
- Advanced air cooled motor design for operation in high ambient temperatures
- Proprietary oil mist free exhaust port cap for clean, safe job environment
- Gas ballast valve speeds achievement of deep vacuum
- Multiple port connections for 1 / 4", 3 / 8" SAE and 1 / 2" ACME
- Easy maintenance with large oil sight glass and fill port with easily accessible oil drain port

- Dual voltage operation 110-120V / 220V Solid rubber base provides extreme shock resistance
 - Sure grip handle ergonomically designed for superior comfort and
 - Proprietary spring activated polymer based exhaust valve enables a 99.999% seal on the discharge port of the vacuum pump mechanism
 - Improved materials selection including hardness and additives, reduces wear and prevents gallings
 - Improved internal oiling system design extends life and improves vacuum performance

EVVP1001

4 cfm





VP4D Vacuum Pump 2 stage 4cfm 220-230v (Single) Dual Voltage

Key Features:

- Dual voltage operation 110-120V / 220V Multiple port connections for $\frac{1}{4}$, $\frac{3}{8}$ "
- Exceptional ultimate vacuum rating as low as 10 microns
- Advanced air cooled motor design for operation in high ambient temperatures
- Proprietary oil mist free exhaust port cap for clean, safe job environment
- Gas ballast valve speeds achievement of deep vacuum
- and ½" ACME
- Easy maintenance with large oil sight glass and fill port with easily accessible oil drain port.
- Solid rubber base provides extreme shock resistance
- Sure grip handle ergonomically designed for superior comfort and portability

EVVP1003

VPAS8 Vacuum Pump Anti-Siphon Valve 3/8"FFL VPAS8 **EVO2044 VPASU CPS Vacuum Pump Anti-Siphon Kit VPASU EVAd1839**

6 cfm spark proof







VPS6DEV Vacuum Pump 2 stage 6cfm 220-230v (Single) SPARK PROOF

Key Features:

- low as 10 microns
- Advanced air cooled motor design for operation in high ambient temperatures
- Proprietary oil mist free exhaust port cap for clean, safe job environment
- Gas ballast valve speeds achievement of deep vacuum
- Multiple port connections for ¼", 3/8" and ½" ACME
- Exceptional ultimate vacuum rating as Easy maintenance with large oil sight glass and fill port with easily accessible oil drain port.
 - Solid rubber base provides extreme shock resistance
 - Sure grip handle ergonomically designed for superior comfort and portability

EVVP1008

Vacuum pump hoses



HV5 HOSE BL 3/8" 150CM CHARGING & VACUUM

EVHA1754



Vacuum pump oil



VPOG Pro-Set® Premium Vacuum Pump Oil 1G	EVO2036
VPOG6 Pro-Set® Premium Vacuum Pump Oil 1G x 6pk	EVO2037
VPOP Pro-Set® Premium Vacuum Pump Oil 0.5l (Single)	EVO2038
VPOP12 Pro-Set® Premium Vacuum Pump Oil 0.5l x 12 Bottles	EVO2039





see page 10







Safety Valve Hose Set 150cm (5ft) Premium 1/4" SAE FM x 5/16" FM (HK5N)

Key Features:

- Suitable for standard refrigerants, including R410a
- 180cm Hoses (5ft)
- Patented Safety Valve Technology
- Colour Coded Hoses, Traditional: Red, Yellow and Blue, all complete with Safety Valve Fittings on one end.
- Single Touch Point: Safer for technician without Loss of Refrigerant
- Rotating Safety Valves: Allows for Flexible Operation

EVHA1762



Safety Valve Hose Set 150cm Premium 1/4" SAE FM x 1/4" FM (HP5N)

Key Features:

- Suitable for standard refrigerants, including R410a
- 180cm Hoses (5ft)
- Patented Safety Valve Technology
- Colour Coded Hoses, Traditional: Red, Yellow and Blue, all complete with Safety Valve Fittings on one end.
- Single Touch Point: Safer for technician without Loss of Refrigerant
- Rotating Safety Valves: Allows for Flexible Operation

EVHA1760



BV Ball Valve 1/4 Male x 1/4 Female

- Easy 1/4 turn open/close with rugged plastic composite color-coded handles
- Oversized chrome ball for smooth operation and non-restrictive flow
- Individual valves include all three colourcoded handle inserts



BV EVBV1930

BV3 PRO-SET® BALL VALVES 1/4"SAE M X 1/4"SAE F BALLVALVE 3PK

• PRO-SET® BALL VALVES

• 1/4" SAE M X 1/4"SAE F BALLVALVE 3PK



EVBV1932

EVBV1938

EVBV1940

BV₃

BV45

BV45 PRO-SET® BALL VALVES 1/4"SAE M X 1/4"SAE F BALL VALVE

 PRO-SET® BALL VALVES 1/4"SAE M X 1/4"SAE F BALL VALVE



CPS BV453 Ball Valve 3PK 1/4"M X 1/4 F" 45°

- Easy 1/4 turn open/close with rugged plastic composite colour-coded handles
- Oversized chrome ball for smooth operation and non-restrictive flow
- Individual valves include all three colourcoded handle inserts



BV453 EVBV1939

BV90 BALL VALVE 90° 1/4"SAE Male X 1/4"SAE Female (Single)

• BALL VALVE 90° 1/4"SAE Male X 1/4"SAE Female



BV90



HK3 Premium Conversion Hoses, 3ft/90cm, 3-Pack

- 3 ft. (90 cm)
- R-410A Compatible
- Conversion hoses
- 1/4 in.-20 SAE Female x 5/16 in. (1/2 in.-20 UNF) Female fittings



EVHA1548

HK3

HK5 Premium Conversion Hoses, 5ft, 3-Pack

- 5 ft. (150cm)
- R-410A Compatible
- Conversion hoses
- 1/4 in.-20 SAE Female x 5/16 in. (1/2 in.-20 UNF) Female fittings



HK5 EVHA1549

HP3E 3' Premium 90cm 1/4" Ball-Valve Hoses 3 Pack

- R-410A Compatible
- Environment friendly Nylon Permeation Barrier meets SAE J2196
- Compatible with CFC, HCFC and HFC refrigerants & blends
- Adjustable valve core depressor opens all out of tolerance Schraeder® valves
- 800 psi working pressure; 4000 psi burst
- All-weather flexibility and strength




HP3E EVHA1572

EVHA1619

HP6E Mixed 1/4" Hoses with 45° ball valve (3 pack) 180cm

- Compatible with CFC, HCFC, HFC refrigerants and blends
- Leak-proof 8-sided crimps
- Working pressure (Psi)
- Burst pressure (Psi)
- Blow off grooves to prevent spray back
- Adjustable valve core depressor
- Extra deep knurling for easy grip



TLVC1 EVT2112

TLVC1 PRO-SET Pocket Valve Core Tool w. 4 Spare Cores

• PRO-SET SPECIALTY TOOLS Pocket Valve Core Tool w/4 Spare Cores







EVHA1652

EVHA1680

EVHA1643

HS3 Standard 1/4" Fitting Refrigerant Charging Hoses 90cm (3ft) 3pk

- 3 ft. (90cm)
- All-weather flexibility and strength
- Extra deep knurling on nuts for easy grip
- Available with MicroSeal™ or ball valve fittings
- Leak-proof eight-sided crimp
- Blow-off grooves channel refrigerant to prevent spray back



HS₃

HS₅

HS10

HS5 Standard 1/4" Fitting Refrigerant Charging Hoses 150cm (5ft) 3pk

- Compatible with CFC, HCFC, HFC refrigerants and blends
- Leak-proof 8-sided crimps
- Working pressure (Psi)
- Burst pressure (Psi)
- Blow off grooves to prevent spray back
- Adjustable valve core depressor



HS10 10 Inch (300 cm) Standard 1/4 Inch Hoses for all Refrigerants 3 pack

- Compatible with CFC, HCFC, HFC refrigerants and blends
- Leak-proof 8-sided crimps
- Working pressure (Psi)
- Burst pressure (Psi)
- Blow off grooves to prevent spray back
- Adjustable valve core depressor
- Extra deep knurling for easy grip
- Nylon permeation barrier (Meets SAE J2196)



HXG 1/4" Hose Replacement Gasket (10pk)

• (10) Hose 1/4" SAE Neoprene Gaskets



HXG

EVHA1759

HXG2 5/16" Hose Replacement Gasket (10pk)

- GASKETS HOSE R410a 1/2"/20 (10X) BLUE (HXG2)
- (10) 1/2" ACME, 1/2"-20 UNF Replacement Hose Gaskets



HXG2

EVHA1764

TLVC2 Dual Core Remover

• CPS TLVC2 Dual Schrader Core Remover (1/4" SAE Valves and Auto R-134a Valves)



TLVC2

EVT2113

Manifolds







R410A-A4 VORTECH MNFL3/150CM BV HOSES/CASE MV12AJ5EC

Key Features:

- Sight Glass 80mm Ø Gauges.
- Supplied 3 x 150cm 1/4" R/Y/B Hoses
- Black Vacuum Hose
- Foam Filled Carry Case
- Analogue Gauges Read: R410a
- Measures Pressures in: bar/psi/oC
- Carry Case
- 5/16" M x 1/4" F Adaptor inc.

EVMG1353



4-Way R410a Vortech Manifold w. 3pack 150cm Hose w. Ball valves and Carry Case MV12EJ5EC

Key Features:

- Sight Glass 80mm Ø Gauges.
- Supplied 3 x 150cm 1/4" R/Y/B Hoses
- Black Vacuum Hose
- Foam Filled Carry Case
- Analogue Gauges Read: R410a
- Measures Pressures in: bar/psi/oC
- Carry Case
- 5/16" M x 1/4" F Adaptor inc.

EVMG1353



2-Way Vortech Manifold w. 3pack 90cm Hose and Carry Case R22, R134a, R404A, R407C MV2JS3C

Key Features:

- Sight Glass 80mm Ø Gauges.
- Supplied 3 x 90cm 1/4" R/Y/B Hoses
- Foam Filled Carry Case
- Analogue Gauges Read: R22, R134a, R404A, R407C
- Measures Pressures in: bar/psi/oC

EVMG1417



4-Way Vortech Manifold w. 3pack 150cm Hose and Carry Case R22, R134a, R404A, R407C MV4JS5C

Key Features:

- Sight Glass 80mm Ø Gauges.
- Supplied 3 x 150cm 1/4" R/Y/B Hoses
- Foam Filled Carry Case
- Analogue Gauges Read: R22, R134a, R404A, R407C
- Measures Pressures in: bar/psi/oC.

EVMG1370

Manifolds





4-Way Vortech Manifold w. 3pack 150cm Hose and Carry Case R134a, 404A, 507, 407C MV4KS5C

Key Features:

- Sight Glass 80mm Ø Gauges.
- Supplied 3 x 150cm 1/4" R/Y/B Hoses
- Foam Filled Carry Case
- Analogue Gauges Read: R134a, 404A, 507, 407C
- Measures Pressures in: bar/psi/oC.

EVMG1369



MTHFO134 R134a / R1234YF Automotive Manifold Gauge Set

Key Features:

- Manifold with gauges for R134a and R1234YF
- Set of 3 x 1/4 fl 6ft hoses (red, yellow and blue)
- Automotive Couplers for R134a
- Automotive Couplers For R1234yf
- HFO-1234YF Honeywell Bottle adapter
- Padded carry case
- Valve Type: Ball valve design

EVMG1372

Repair kits



Diaphragm Manifold Vortech
CPS Manifold 2 Valve (MV2XRK)



MV2XRK EVMG1506

Diaphragm Manifold Vortech
CPS Manifold 4 Valve (MV4XRK)



MV4XRK EVMG1505

Gauges





VG100A VACROMETER™ Vacuum Gauge 1/4"SAE (INCL 1 BATTERY)

Key Features:

- Advanced sensor design with selfheated thermistor bridge and automatic temperature compensation
- Field cleanable sensor designed to withstand 400 Psi of positive pressure
- Brass T adapter (AVT45), hanging hook (VGXH) and carrying case (VGXC) included with VG200, VG100A
- Calibrated to strict NIST standards for best-in-class accuracy and reliability
- Designed and manufactured in the USA with U.S. and globally sourced components
- VG100A, VG101;
- Vacuum level indication at Atm (Atmosphere), 5000, 2000, 1000, 500, 250, 100, 50 & 25 microns

EVVP1015



VG200 Digital LCD Vacuum Gauge (incl. 1 Battery) VG200W


Key Features:

- Calibrated to strict NIST standards
- Best-in-class accuracy and reliability
- Automatic temperature compensation
- Cleanable sensor, withstands 400 PSI positive pressure
- Large, easy to read 5-digit LCD display
- Selectable units: Microns, Torr, in/hg and mBar

EVVP1017

1-2-3 EASY STEPS TO ONLINE ORDERING

1 ORDER FROM WEBSITE

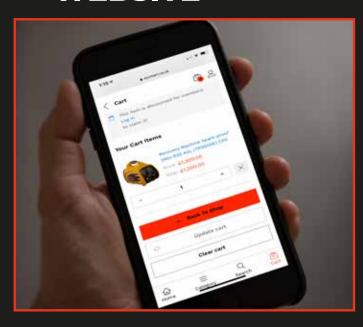

2 COLLECT FROM OR EVOMART



3 OPT FOR DELIVERY FROM EVOMART



DID YOU KNOW

ALL OUR RECOVERY MACHINES COME WITH A 4" HOSE AND 032 FILTER! AS STANDARD

WORTH OVER £15.00

Wrenches





BlackMAX® Digital **Torque Wrench**

Key Features:

- Ensures OEM torque setting compliance
- Ideal for HVAC mini-split installations
- Jaw opening: 3/16" to 1-7/16" (5 to 35mm)
- Torque settings: Lbf.ft, Lbf.in, N-m, Kgf.m
- Pre-set and actual torque values:- View both same time
- LED Torque Alerts: Green= within 50-98%, Red= within 2%
- Memory Presets: 5 common, 5 open for

custom torque values

- Track mode View real-time torque value reached during use
- Peak mode Maximum torque value reached is stored temporarily
- Auto-Off (Selectable): Conserves battery
- Display light key

EVFS1208



EVT2079 TLAW06 **EVT2080** EVT2081 TLAW10 **EVT2082** TLAW12

TLAW ADJUSTABLE WRENCH, RUBBER HANDLE

Key Features:

- Precision machined chrome vanadium steel Ergonomic, comfort grip reduces fatigue
- Rubber encased handle
- · Wide jaw opening

- Environmentally resistant
- 1 year warranty



TLSWS PRO-SET® Service Wrench Offset 3/16, 1/4, 3/8, 5/16

EVT2107



TLSWS PRO-SET® Service Wrench Offset 3/16, 1/4, 3/8, 5/16

EVT2106

Tube benders







BTB300 Tube Bender BlackMax 1/4-7/8 (7) Sizes

Key Features:

• Premium Ratcheting Tube Bender w/ Reverse Bend: 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8" O.D. Tubing







TB04 | Lever Type Tube Bender 1/4"

Key Features:

- · Constructed of high strength steel for durability and long life
- Create smooth, tight radius bends up to 180° with minimal effort
- · Bends without scoring or flattening of
- Calibrated to show angle of bend
- Wide hook grips tubing securely

EVTB1027



TB05 | Lever Type Tube Bender 5/16"

Key Features:

- · Constructed of high strength steel for durability and long life
- Create smooth, tight radius bends up to 180° with minimal effort
- Bends without scoring or flattening of
- Calibrated to show angle of bend
- Wide hook grips tubing securely

EVTB1028



BTB06 | Lever Type Tube Bender



Key Features:

- · Constructed of high strength steel for durability and long life
- Create smooth, tight radius bends up to 180° with minimal effort
- · Bends without scoring or flattening of
- Calibrated to show angle of bend
- Wide hook grips tubing securely

EVTB1029



TB08 | Lever Type Tube Bender

Key Features:

- · Constructed of high strength steel for durability and long life
- Create smooth, tight radius bends up to 180° with minimal effort
- Bends without scoring or flattening of
- Calibrated to show angle of bend
- Wide hook grips tubing securely

EVTB1030



BTB10 | Lever Type Tube Bender 5/8" |



Key Features:

- BlackMax level tube bender
- Constructed of high strength steel for durability and long life
- Create smooth, tight radius bends up to 180° with minimal effort
- · Bends without scoring or flattening of
- · Calibrated to show angle of bend
- · Wide hook grips tubing securely

EVTB1031

Tube benders





EVTB1042 TBS05 EVTB1043 TBS06

EVTB1044 TBS08 EVTB1045 TBS10 EVTB1046 TBS12

TBS SERIES SPRING BENDERS

Key Features:

- For soft copper and aluminium tubing
- Special spring steel with zinc finish
- Hand bend tubing to any shape without collapsing walls
- End bell design for quick removal of tubing

Tube cutters





BTC200 BlackMax Mini Tube Cutter 1/8 to 7/8

Key Features:

- Great for confined spaces
- Cutting Range: 1/8" 7/8" (3-22 mm) O.D. Durable aluminium and rubber knob
- Chromed, hardened cutting wheel
- Provides a smooth cut, even for slightly deformed tube
- Soft/Hard cutting settings
- Size (HWD): 2.75" x 1.6" x 0.8" (72 x 40 23
- Clamshell package with colour insert card

EVTC1171



BTC300 BlackMax Mini Tube Cutter 1/8" to 1-1/4"



Key Features:

• Mini Tube Cutter 1/8" to 1-1/4"

EVTC1173

Tube cutters





TC127 Tight Space Tube Cutter 1/8" to 5/8"

Key Features:

- O.D. (4mm to 15mm O.D.) tubing
- Ideal for cutting pipe in limited access areas
- Screw feed mechanism for smooth operation



- Precision machined chromium steel cutting wheels
- Rollers feature flare cut-off groove to reduce tube loss

EVTC1157



TC174 MINI TUBE CUTTER 3/8-1 1/8",10-28MM

Key Features:

- Ideal for cutting pipe in limited access areas
- Screw feed mechanism for smooth operation
- Precision machined chromium steel cutting wheels
- Rollers feature flare cut-off groove to reduce tube loss

EVTC1158



TC274 Tube Cutter 1/8' - 1 1/8'

Key Features:

- Hardened steel thrust bearing feed mechanisms for smooth operation
- Precision machined chromium steel cutting wheels
- Rollers feature flare cut-off groove to reduce tube loss
- Foldaway hardened steel reamers for deburring

EVTC1160



TC312 Tube Cutter 1/8"-1 5/8"

Key Features:

- Hardened steel thrust bearing feed mechanisms for smooth operation
- Precision machined chromium steel cutting wheels
- Rollers feature flare cut-off groove to reduce tube loss
- Foldaway hardened steel reamers for deburring

EVTC1161

Flaring & swaging





BFT850 BM FLARING TOOL (7 POSITION)

Key Features:

- Aluminium body is 50% lighter than steel designs
- Internal clutch indicates when formed flare is complete
- Seven quick-change positions for flaring soft copper and aluminium tube
- Compact, professional, patented design
- Eccentric cone forms precise 45° flared
- ends
- Strong carrying case
- Imperial tool for 3/16", 1/4" 5/16", 3/8", 1/2", 5/8", 3/4" O.D.
- Built in slide gauge for tube height adjustment
- Packaging: Colour box







FS275 FLARING/SWAGING TOOL

Key Features:

- Complete kit for flaring and swaging 9 sizes of tubing
- Rugged forged steel slip-on yoke and hardened flaring bar
- Chrome finished flaring cone forms better flares with less effort
- Positive grip flaring bar eliminates tube movement
- · Easy operation with professional results
- 1 year warranty

EVFS1211



FT525 FLARING/SWAGING TOOL

Key Features:

- Universal tube holding mechanism adjusts to hold 3/" to 5/8" (4.75 to 16mm) O.D. tubing
- Unique faceted flaring cone automatically burnishes flare face during operation
- Produces perfect 45° flares while
- maintaining thickness at base of flare
- Rugged forged steel slip-on yoke with large handle for ease of use
- Compact design is ideal for use in tight quarters
- 1 year warranty

EVFS1217



EVFS1204

BFT850D BM FLARING TOOL (7 POSITION) with Drill Feature

Kev Features:

- Aluminium body is 50% lighter than steel designs
- Internal clutch indicates when formed flare is complete
- Seven quick-change positions for flaring soft copper and aluminium tube
- Compact, professional, patented design
- Eccentric cone forms precise 45° flared
- ends
- Strong carrying case
- Imperial tool for 3/16", 1/4" 5/16", 3/8", 1/2", 5/8", 3/4" O.D.
- Built in slide gauge for tube height adjustment
- Packaging: Colour box

Flaring & swaging





FT195 FLARING/SWAGING TOOL

Key Features:

- sizes of tubing
- Rugged forged steel slip-on yoke and hardened flaring bar
- Chrome finished flaring cone forms better flares with less effort
- Essential tool flares 7 most common Positive grip flaring bar eliminates tube movement
 - Easy operation with professional results

EVFS1213



FT800FN FLARING/SWAGING TOOL (R410A)

Key Features:

- Engineered to create stronger flare joints for high pressure R-410A systems
- Unique clutch driven feed screw and faceted cone produce uniform, clean flare • walls without thin spots or galling
- Provides an exact amount of flaring
- torque with break away clutch system
- Innovative 3/8" square drive incorporated directly in yoke handle for use of ratchet
- Rugged polyethylene storage case included.
- 1 year warranty

EVFS1218



FT806A FLARING/SWAGING TOOL

Key Features:

- Unique clutch driven feed screw and faceted cone produce uniform, clean flare walls without thin spots or galling
- Provides an exact amount of flaring torque with break away clutch system
- Innovative 3/8" square drive incorporated directly in yoke handle for use of ratchet
- Rugged polyethylene storage case included.
- 1 year warranty

EVFS1219

TLMSP CPS® Swaging Punch



Key Features:

- All-In-One swaging punch tool includes six Sizes for 3/16", 1/4", 5/16", 3/8", 1/2", and sizes of swaging ends on one tool
- Designed to enlarge one end of copper tubing to make a connection without a fitting
- Gives you one solder join not two cutting time spent soldering or brazing in
- Curable heat-treated plated allow steel.
- Cuts your solder and brazing time in half.

EVFS1221

Tube expander





BTLE9 BM Tube Expander Kit Hand held (9 heads) Premium



Key Features:

- Color-coded imperial head sizes: 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1-1/8"
- For soft copper and aluminum tube
- Nine quick-change tube expanders
- Durable, color-coded, aluminum heads
- Compact, professional, patented design
- Strong carrying case

EVTE1138

Temperature





TMDP Digital Pocket Thermometer, -50 to 150°C

Key Features:

- Digital pocket thermometer
- Stainless steel probe and pocket clip
- Temperature Range: -58° to 302°F / -50° to 150°C
- User selectable °F / °C
- Auto Off

EVTH2140

Other tools





TLFC1 Universal Metal Fin Comb

EVFc2023



TLFC6 6 Sided Fin Comb

EVFc2025



TLMIR 6 Sided Fin Comb

EVM2067



TLPP Locking piercing pliers with 1/4" port

Key Features:

- Tool simultaneously pierces tubing as it locks into place to create a temporary 1/4" access port on systems
- Simply adjust pliers to proper tubing size, align tip to the centre of tube and clamp down.
- Piercing tip is self-sharpening and replaceable
- Jaw size accommodates 1/" to 7/" O.D. tubing
- Fast release mechanism
- 1 year warranty

EVT2096



BTLDB3 BM Deburring tool with extra blades

EVDe1199

Multimeters







IAQPro Indoor Air Quality Monitor

Key Features:

- Monitor Indoor Air Quality (IAQPro) CPS measures 8 Air Quality Factors:
- PM 2.5 Fine Inhalable Particle, with diameters less than 2.5 microns.
- PM 10 Inhalable Particles, with diameters less than 10 microns.
- VOC's VOC's are emitted by thousands of products containing organic chemicals.
- CO2 Carbon Dioxide is used in refrigeration, carbonated beverages, fire extinguishers, aerosols, fertilizer production and many other applications.
- Temperature -Due to variations in humidity and clothing, temperature recommendations for summer and winter vary:
- Summer: 73-78 (°F) / 23-25.5(°C)
- Winter: 68-74 (°F) / 20-23.5(°C)
- Relative Humidity Preferences for indoor humidity levels vary. A relative humidity of 50% means the air is holding one half of the water vapor it can hold. When the air cannot "hold" all the moisture, it condenses as "Dew".
- Pressure A good rule is to operate your building at a slightly positive pressure (+.02in. to +.03in. water column) with respect to the outdoors.
- An imbalance between the supply and exhaust air creates a positive pressure inside the building vs. the pressure outside.
- Dew Point Dew Point is a good indicator of comfort. Most people find Dew Point temperatures less than 60 (°F) to be comfortable.

• APP Features:

- Syncs perfectly with CPSLink
- TroubleShooting

Tech Support



EVT1288

Multimeters





TS-100-6PK | Temperature and Humidity Data Loggers 6-Pack

Key Features:

- Dry Bulb Temperature
- Wet Bulb Temperature
- Feels Like Temperature (compares temperature and humidity)
- Dew Point
- Relative Humidity
- E-mail professional reports for work
- completed, and where located
- Client Lists Easy to enter and retain client contact information
- Select from 4 languages to work in (English, French, Spanish, German)
- Cloud back up of data

EVT1286



AC750 CLAMP-SEEKER DIGITAL (INCL 3 BATTERY)

Key Features:

- Versatile for testing AC/DC voltage, AC/ DC current, resistance and frequency
- True RMS AC measurement
- Max. / Min. value measurement
- Audible continuity and diode test
- Non contact voltage detection
- Integrated clamp light and LCD backlight
- Auto zero key for DCA measurement
- Auto/Manual range, auto power off
- Secondary injection molded case, safety as per IEC1010 CAT.III 600V
- Includes: DMXTL CAT 3, 1000V test leads

EVM1263

Scales





CC220 Compute-a-Charge Scale

Key Features:

- Unparalleled accuracy, precision and reliability
- Calibrated to strict NIST (National Institute of Standards & Technology) standards
- Ergonomic hand-held remote controls with large, high contrast wide-angle LCD displays
- Rugged cast aluminium platform and base
 assemblies for stability and long life
- Electronic and mechanical overload protected to withstand 150% of capacity
- Environmentally sealed and temperature compensated for reliable operation in

- extreme environments
- Automatic tare upon start up and manual zero function
- Magnetic backing on hand held display for mounting to metal services or 360° swivel hanging hook
- Durable protective transport case enables operation of scale in or out of enclosure
- Ideal for critical charging of systems large or small and all refrigerant recovery applications
- The widest range of programmable, manual, or wireless/hand-held configurations

EVWS1960

Accessories







TLMKC18 SOLENOID SERVICE MAGNET, 18mm

Key Features:

- Direct connect or pilot operated 2-way solenoids
- 3- way reclaim valves
- 4-way reversing valves
- 0.75" (18 mm) fits all common industry valves

EVM2070



CCXHBV CPS Heater Strap 220v

Key Features:

- Adjustable, to fit refrigerant supply or recovery tanks from 8" (20 cm)
- to 14" (35 cm) in diameter
- Thermostat controlled with a maximum of 130°F (55°C) and a minimum of 115°F (46°C)
- surface temperature of tank
- Cycles ON/OFF to maintain surface

temperature

- 19" (0.48 m) velcro strap
- 340 watt, CCXHB (100-127 VAC), CCXHBV (200-264 VAC)
- 2" (.6 m) cord
- 200°F (93°C) Maximum temperature overload protected
- UK plug inc. (not European)

EVB1307

Adaptors & valves



AD14 I Automotive 14mm M x 1/4" SAE M

• Used to adapt 14mm R134a service couplers to 1/4" flare for universal use.



AD14 EVAd1804

AD41 Gas Bottle Adaptor 3/4"-14 x 1/4" SAE M

• AD41 Gas Bottle Adaptor 3/4"-14 x 1/4" SAE M



AD41 EVAd1812

AD51 EU TANK Adapter, 5/8 BSP x 1/4 SAE Male

• AD51 EU TANK Adapter, 5/8 BSP x 1/4 SAE Male



AD51 EVAd1821

AD78 Adaptor 1/4" FEM X 1/2"-20 MALE ADAPTER

• 1/4" FEM X 1/2"-20 MALE ADAPTER



AD78 EVAd1826

AD87 R410A ADAPT.M1/4"SAE X FM5/16"SAE (1/2"20UNF)

 ADAPTER R410A AD87 male 1/4" SAE x female 5/16"SAE



AD87 EVAd1831

AVT44 Access Fitting. 1/4 in SAE Female Hex x 1/4 in SAE M x 1/4 in SAE M w/cap & core

 CPS Access Fittings 1/4 in SAE Female Hex x 1/4 in SAE M x 1/4 in SAE M w/cap & core



AVT44 EVAv1920

AVT45 1/4 in SAE M x 1/4 in SAE female knurl x 1/4 in SAE Male

• AVT45 1/4 in SAE M x 1/4 in SAE female knurl x 1/4 in SAE Male



AVT45 EVAv1921

CPS (QC123414SET) HFO-1234YF Couplers

 Manifold Retrofit Kit HFO with High and Low manual couplers with 1/4" SAE Male Connection on couplers (to be used with 1/4" SAE hose sets) including an AD84L tank adapter





QC123414SETEVQ1760

CPS AD84L - 1/2" ACME F Left hand thread x 1/4" SAE M Adapter

• This hard to find bottle adapter is the one you need for use with on a cylinder of R1234YF /HFO1234YF refrigerant -1/" acme left hand female fitting to a 1/4 Flare Male.



AD84L EVAd1830

Vehicle AC Cleaner





Optima Revival Vehicle Air Conditioning Cleaner + 6 x Sanitizer Chemicals

Key Features:

- Ultrasonic cleaning.
- Disposable (economic model)
- For any vehicle and A/C environment.
- Particles less than 58m.
- 20 minutes treatment.

- Simple automatic use.
- Comes with 6 bottles (treatments) inclusive.
- Vanishes odours, mould and kills bacteria's. Where to use: Cars, buses, ambulances, trucks, farming vehicles, car fleet companies, car rentals

EVS2677



Optima Revival Vehicle Air Conditioning Cleaner + 6 x Sanitizer Chemicals

Key Features:

- Ultrasonic Cleaning
- Sanitise in 20mins
- Kills nasty odours, mould and bacteria
- Improves In-Car Air Quality
- For use with Optima Revival Nebuliser
- Where to use: Cars, buses, ambulances, trucks, farming vehicles, car fleet companies, car rentals

EVS2678







Liquid Line DCH







Liquid line filter driers are employed to filter particulate, absorb moisture and eliminate acids from liquid refrigerants and POE oils. This problem has become more acute with the advent of HFC refrigerants and POE oils because of their high hygroscopic and polar nature.

DCH Series

DCH SERIES IS RECOMMENDED FOR COMMERCIAL AIR CONDITIONING, COMMERCIAL REFRIGERATION, COLD CHAINS, PRECISION AIR CONDITIONERS, INDUSTRIAL REFRIGERATION, FOOD RETAIL.

DCH-032F Liquid Line FD 1/4" SAE Flare	EVFD2775
DCH-032S Liquid Line FD 1/4" ODS Solder	EVFD2776
DCH-033F Liquid Line FD 3/8" ODS Solder	EVFD2777
DCH-033S Liquid Line FD 3/8" ODS Solder	EVFD2778
DCH-052F Liquid Line FD 1/4" Flare	EVFD2779
DCH-052S Liquid Line FD 1/4" Solder	EVFD2780
DCH-053F Liquid Line FD 3/8" Flare	EVFD2781
DCH-053S Liquid Line FD 3/8" Solder	EVFD2782
DCH-082F Liquid Line FD1/4" Flare	EVFD2783
DCH-082S Liquid Line FD 1/4" Solder	EVFD2784
DCH-083F Liquid Line FD 3/8" Flare	EVFD2785
DCH-083S Liquid Line FD 3/8" Solder	EVFD2786
DCH-084F Liquid Line FD 1/2" Flare	EVFD2787
DCH-084S Liquid Line FD 1/2" Solder	EVFD2788
DCH-163F Liquid Line FD 3/8" Flare	EVFD2789
DCH-163S Liquid Line FD 3/8" Solder	EVFD2790
DCH-164F Liquid Line FD 1/2" Flare	EVFD2791
DCH-164S Liquid Line FD 1/2" Solder	EVFD2792
DCH-165F Liquid Line FD 5/8" Flare	EVFD2793
DCH-165S Liquid Line FD 5/8" Solder	EVFD2794
DCH-303F Liquid Line FD 3/8" Flare	EVFD2795
DCH-303S Liquid Line FD 3/8" Solder	EVFD2796
DCH-304F Liquid Line FD 1/2" Flare	EVFD2797
DCH-304S Liquid Line FD 1/2" Solder	EVFD2798
DCH-305F Liquid Line FD 5/8" Flare	EVFD2799
DCH-305S Liquid Line FD 5/8" Solder	EVFD2800
DCH-306S Liquid Line FD 3/4" Solder	EVFD2802
DCH-307S Liquid Line FD 7/8" Solder	EVFD2803
DCH-309S Liquid Line FD 1-1/8"Solder	EVFD2804
DCH-415 Filter Drier 5/8"+1/2"	EVFD2808
DCH-415F Filter Drier 1/2"	EVFD2807

The Series





Liquid Line DMH







The DMH series liquid line filter driers are designed to protect the refrigerant system from liquid and solid contaminants. They incorporate a specially formulated desiccant blend of molecular sieves and activated alumina providing very high mechanical strength, outstanding filtration capability, high moisture absorption and acid removal.

DMH Series

DMH SERIES IS RECOMMENDED FOR REFRIGERATION, FREEZING, AIR-CONDITIONING SYSTEMS AND FOR MOBILE REFRIGERATION.

DMH-032F Liquid Line FD 1/4" SAE Flare	EVFD2775
DMH-032S Liquid Line FD 1/4" ODS Solder	EVFD2776
DMH-033F Liquid Line FD 3/8" ODS Solder	EVFD2777
DMH-033S Liquid Line FD 3/8" ODS Solder	EVFD2778
DMH-052F Liquid Line FD 1/4" Flare	EVFD2779
DMH-052S Liquid Line FD 1/4" Solder	EVFD2780
DMH-053F Liquid Line FD 3/8" Flare	EVFD2781
DMH-053S Liquid Line FD 3/8" Solder	EVFD2782
DMH-082F Liquid Line FD1/4" Flare	EVFD2783
DMH-082S Liquid Line FD 1/4" Solder	EVFD2784
DMH-083F Liquid Line FD 3/8" Flare	EVFD2785
DMH-083S Liquid Line FD 3/8" Solder	EVFD2786
DMH-084F Liquid Line FD 1/2" Flare	EVFD2787
DMH-084S Liquid Line FD 1/2" Solder	EVFD2788
DMH-163F Liquid Line FD 3/8" Flare	EVFD2789
DMH-163S Liquid Line FD 3/8" Solder	EVFD2790
DMH-164F Liquid Line FD 1/2" Flare	EVFD2791
DMH-164S Liquid Line FD 1/2" Solder	EVFD2792
DMH-165F Liquid Line FD 5/8" Flare	EVFD2793
DMH-165S Liquid Line FD 5/8" Solder	EVFD2794
DMH-303F Liquid Line FD 3/8" Flare	EVFD2795
DMH-303S Liquid Line FD 3/8" Solder	EVFD2796
DMH-304F Liquid Line FD 1/2" Flare	EVFD2797
DMH-304S Liquid Line FD 1/2" Solder	EVFD2798
DMH-305F Liquid Line FD 5/8" Flare	EVFD2799
DMH-305S Liquid Line FD 5/8" Solder	EVFD2800
DMH-306S Liquid Line FD 3/4" Solder	EVFD2802
DMH-307S Liquid Line FD 7/8" Solder	EVFD2803
DMH-309S Liquid Line FD 1-1/8"Solder	EVFD2804
DMH-415 Filter Drier 5/8"+1/2"	EVFD2808
DMH-415F Filter Drier 1/2"	EVFD2807

The Series





UV Wafer




- A tracer wafer charged with fluorescent dye is placed along with the desiccant
- When the system starts, dye in the wafer is released and mixes with the lubricant and circulates with the oil and refrigerant
- In the event of leaks, the dye/oil mixture escapes with the refrigerant leaving a mark at point of leak
- The exact point of the leak is easily visible with the help of an ultraviolet (UV) flashlight in conjunction with yellow glasses
- After the repair, wipe off the residual dye using 'Glow Away' or similar cleaner



TW UV Glasses for	
Refrigerant Leak Detection	EVL2025
TW UV Torch for	
Refrigerant Leak Detection	EVL2024





TW DCH-032F Liquid Line FD 1/4" ODS Flare (UV Dye Wafer inc.)

TW DCH Series

1 vv Der 1 0321 Elquid Ellie 1 D 1/4 OD3 Hare (0 v Dye vvaret line.)	LVIDZUIZ
TW DCH-032S Liquid Line FD 1/4" ODS Solder (UV Dye Wafer inc.)	EVFD2813
TW DCH-033F Liquid Line FD 3/8" SAE Flare (UV Dye Wafer inc.	EVFD2814
TW DCH-033S Liquid Line FD 3/8" ODS Flare (UV Dye Wafer inc.)	EVFD2815
TW DCH-052F 1/4" SAE Flare (UV Dye Wafer inc.)	EVFD2816
TW DCH-052S 1/4" ODS Solder (UV Dye Wafer inc.)	EVFD2817
TW DCH-053F Liquid Line FD 3/8" Flare (UV Dye Wafer inc.)	EVFD2818
TW DCH-053S Liquid Line FD 3/8" Solder (UV Dye Wafer inc.)	EVFD2819
TW DCH-082F 1/4" SAE Flare (UV Dye Wafer inc.)	EVFD2820
TW DCH-082S 1/4" ODS Solder (UV Dye Wafer inc.)	EVFD2821
TW DCH-083F 3/8" SAE Flare (UV Dye Wafer inc.)	EVFD2822
TW DCH-083S 3/8" ODS Solder (UV Dye Wafer inc.)	EVFD2823
TW DCH-084F 1/2" SAE Flare (UV Dye Wafer inc.)	EVFD2824
TW DCH-084S 1/2" ODS Solder (UV Dye Wafer inc.)	EVFD2825
TW DCH-163F 3/8" SAE Flare (UV Dye Wafer inc.)	EVFD2826
TW DCH-163S 3/8" ODS Solder (UV Dye Wafer inc.)	EVFD2827
TW DCH-164F 1/2" SAE Flare (UV Dye Wafer inc.)	EVFD2828
TW DCH-164S 1/2" ODS Solder (UV Dye Wafer inc.)	EVFD2829
TW DCH-165F 5/8" SAE Flare (UV Dye Wafer inc.)	EVFD2830
TW DCH-165S 5/8" ODS Solder (UV Dye Wafer inc.)	EVFD2831
TW DCH-303F 3/8" SAE Flare (UV Dye Wafer inc.)	EVFD2832
TW DCH-303S 3/8" ODS Solder (UV Dye Wafer inc.)	EVFD2833
TW DCH-304F 1/2" SAE Flare (UV Dye Wafer inc.)	EVFD2834
TW DCH-304S 1/2" ODS Solder (UV Dye Wafer inc.)	EVFD2835
TW DCH-305F 5/8" SAE Flare (UV Dye Wafer inc.)	EVFD2836
TW DCH-305S 5/8" ODS Solder (UV Dye Wafer inc.)	EVFD2837
TW DCH-306F 3/4" SAE Flare (UV Dye Wafer inc.)	EVFD2838
TW DCH-306S 3/4" ODS Solder (UV Dye Wafer inc.)	EVFD2839
TW DCH-307S 7/8" ODS Solder (UV Dye Wafer inc.)	EVFD2840
TW DCH-309S 11/8" ODS Solder (UV Dye Wafer inc.)	EVFD2841
TW DCH-414F 1/2" SAE Flare (UV Dye Wafer inc.)	EVFD2842
TW DCH-414S 1/2" ODS Solder (UV Dye Wafer inc.)	EVFD2843
TW DCH-415F 5/8" SAE Flare (UV Dye Wafer inc.)	EVFD2844
TW DCH-415S 5/8" ODS Solder (UV Dye Wafer inc.)	EVFD2845
TW DCH-417S 7/8" ODS Solder (UV Dye Wafer inc.)	EVFD2846
TW DCH-419S 1 1/8" ODS Solder (UV Dye Wafer inc.)	EVFD2847





EVFD2812

Replaceables











Suction line filter and replaceable filter drier core

TW UV Dye Wafers for Replaceable Filter Cores (100pk) - Dry All	EVL2026
Replacement Filter Core	
DC48, DB48, DSS48:DSS-48 SS Perforated Plate with SS Mesh	EVFD2855
Replacement Filter Core	
DC48, DB48:DB-48 Repl. Suction Solid Filter Core FD	EVFD2850
Replacement Filter Core	
DC48, DB48:DC-48 Repl. Suction Solid Filter Core FD	EVFD2851



FILTER DRIER PRE-CHARGED WITH FLUORESCENT DYE TO HELP YOU FIND THE EXACT SOURCE OF THE REFRIGERANT LEAK



PAG dye that is OEM approved



Compatibility with all refrigerants



Quickly find the exact source of small, multiple and internittant leaks



Leak detection from a distance



Universal/Ester A/C dyes will not impair lubricant properties



Meets SAE standard J2297



Technicians can safely search near moving machinery



Saves time on your service call out







Conserves expensive refrigerant and fluids

vith ts	
n e	EPECTROLINE' T \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \

DRIER MODELS SERIES C-INCH	RECOMMENDED FOR TONNAGE TR	APPROXIMATE OIL CHARGE IN SYSTEM IN LITRES
3	1.4 to 3.3 TR	0.8 to 1.4L
5	1.8 to 4.8 TR	1.4 to 2.0L
8	1.9 to 7.7 TR	1.5 to 3.5L
16	3 to 10.9 TR	2.0 to 4.0L
30	3.5 to 21.5 TR	2.0 to 6.0L
41	7.3 to 30.5 TR	2.5 to 7.5L

500:1 is the recommended dilution ratio for effective fluorescent leak detection


Selection Chart





FILTER DRIER MODEL REFERENCE CHART

SERI	ES	1.5	03	05	08	16	30	41	75
CONNECTION SIZE	NO		MODEL						
1/4"	2	1.52	032	052	082			412	
1/4"	TYPE	S	F/S	F/S	F/S			ORN	
2 /0"	3		033	053	083	163	303	413	
3/8"	TYPE		F/S	F/S/R	F/S/R/Z	F/S/R/Z	F/S/R/ORN	F/S	
	4				084	164	304	414	
1/2"	TYPE				F/S	F/S/R/ ORF/Z	F/S/R	F/S	
F /0"	5					165	305	415	
5/8"	TYPE					F/S/R	F/S/R	F/S/R	
2 /4"	6						306	416	
3/4"	TYPE						F/S	S	
7/0"	7						307	417	757
7/8"	TYPE						S*	S*	S*
11/9"	9						309	419	759
1-1/8"	TYPE						S*	S*	S*
METRIC	20			05M	08M	16M	30M	41M	
THREAD				20	20	20/22	20/22/24	22/24	














S = Braze-type copper connection:

To braze use any standard brazing rod like Harris 'O'

S = Braze-type steel connection:*

To braze use Harris Safety-Silv 25 or equivalent

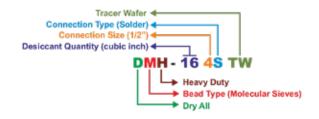

DMH vs DCH



LIQUID LINE FILTER DRIERS ARE CHANGING



Other products



Fan Assembly

A COMPACT STRUCTURE WHICH ENSURES CONVENIENT INSTALLATION AND RELIABLE OPERATION. LOW NOISE AND ENERGY SAVING. HIGH EFFICIENCY



250mm Fan Assembly Single Phase 230v (Blow High Speed)	EVFM2558
250mm Fan Assembly Single Phase 230v (Blow)	EVFM2566
250mm Fan Assembly Single Phase 230v (Suction High Speed)	EVFM2557
300mm Fan Assembly Single Phase 230v (Blow High Speed)	EVFM2561
300mm Fan Assembly Single Phase 230v (Suction High Speed)	EVFM2560
300mm Fan Assembly Single Phase 230v (Suction)	EVFM2562
350mm Fan Assembly Single Phase 230v (Blow)	EVFM2568
350mm Fan Assembly Single Phase 230v (Suction)	EVFM2563
400mm Fan Assembly Single Phase 230v (Blow)	EVFM2569
400mm Fan Assembly Single Phase 230v (Suction)	EVFM2564
450mm Fan Assembly Single Phase 230v (Blow)	EVFM2570
450mm Fan Assembly Single Phase 230v (Suction)	EVFM2565
300mm Fan Assembly Single Phase 230v (Blow)	EVFM2567



Multi-fit Fan Motor + Bracket

10W Multi-Fit Fan Motor + Bracket	EVFM2573
16W Multi-Fit Fan Motor + Bracket	EVFM2574
25W Multi-Fit Fan Motor + Bracket	EVFM2575
34W Multi-Fit Fan Motor + Bracket	EVFM2576
5W Multi-Fit Fan Motor + Bracket	EVFM2572

Fan Blade

Fan Blade 200mm for Mult-ifit Fan Motors	EVFM2577
Fan Blade 230mm for Multi-fit Fan Motors	EVFM2578
Fan Blade 250mm for Mult-fit Fan Motors	EVFM2579
Fan Blade 300mm for Multi-fit Fan Motors	

